


30M IR FIXED LENS BULLET CAMERA

I3-310IPEH04

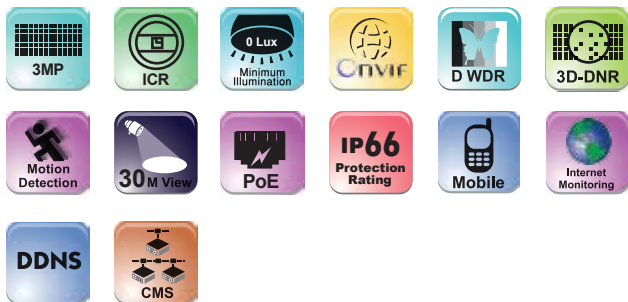

1/3" CMOS Sensor
3 Mega-Pixel
True Day & Night (IR Cut Removable)
0 Lux (IR On) Min. Illumination
ONVIF

Digital WDR
3D Noise Reduction
Motion Detection and Privacy Masking
3.6mm Mega-Pixel Lens
30m IR Illumination

PoE Support
IP 66 Protection

Specifications

Camera	Video	Model	I3-310IPEH04
		Image Sensor	1/3" CMOS
		Effective Pixels	2048×1536
		Electronic Shutter	1/25s ~ 1/100000s
		Day & Night	ICR
		Min. Illumination	0lux (IR ON)
	Audio	Audio compression	No
		Communication	No
	Image Enhancement	Image Settings	AWB(Adjustable), AGC, AES(Auto) Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable
		WDR Range	Digital WDR(Real WDR optional)
		Noise Reduction	3D-DNR
		Image Orientation	Mirror/Flip
		Privacy Zone	Yes
		Motion Detection	Yes
Compression	Video Compression	H.264	
	Resolution	3MP(2048×1536), 1080P(1920×1080), 720P(1280×720), D1, CIF, 480×240	
	Multi-stream	3MP(1~15fps) / 1920×1080(1~30fps) / 1280×720(1~30fps) / D1(1~30fps) / CIF(1~30fps) / 480×240(1~30fps)	
	Bit rate	64Kbps ~ 8Mbps	
	Encode Mode	VBR/CBR	
	Image Quality	Five levels under VBR; Free adjustment under CBR	

Housing	IR Distance	30m (42 IR LED)
	Lens	3.6mm
	Iris	Fixed Iris
	Lens Mount	Φ14 mount
	Water-proof	IP66
	Bracket	3-Axis Wall Bracket
	Dimensions	Φ87mm×219mm
	Weight(gross)	635g
	Network	RJ45 (+PoE)
	Power	DC Socket
Connectivity	Analog Video Output	No
	Mic Connectivity	No
	SD Card	No
	RS485	No
	Alarm	No
	Remote Monitoring	IE Browsing, CMS Control Software
Network	User Access	Supports simultaneous monitoring for up to 10 users with multi-stream real time transmission
	Network Protocol	TCP/IP, UDP, DHCP, NTP, PPPoE, DDNS, SMTP, FTP
	ONVIF	Yes
	Ethernet	100Mbps
	PoE	Yes
Others	Power Supply	DC12V/~500mA / PoE/~6.5W
	Work Environment	-10 C~50 C, 10%~90% Humidity

