


KEY FEATURES

- H.264 ,H.264+ & Dual-stream video compression
- Support HD-TVI, IPC,AHD, CVI and analog cameras with adaptive access
- Support Cloud storage(One Drive, Google Drive or Drop Box)
- HDMI and VGA output at up to 1920x1080P resolution
- Long transmission distance over coax cable
- Up to 4-ch synchronous playback at 1080p resolution
- Playback at up to 256x speed



SPECIFICATION	MZ 40HT
Video/Audio Input	
Audio input	4-ch
Video compression	H.264+/H.264
Analog and HD-TVI video input	4-ch,BNC interface (1.0Vp-p, 75 Ω)connection
Supported camera types	HDTVI: 3MP,1080P/25Hz, 1080P/30Hz,720P/25Hz, 720P/30Hz, 720P/50Hz, 720P/60Hz, AHD: 1080P/25Hz, 1080P/30Hz, 720P/25Hz, 720P/30Hz CVI: 1080P/25Hz, 1080P/30Hz, 720P/25Hz, 720P/30Hz CVBS input
Video Input Interface	BNC (1.0 Vp-p, 75Ω)
Audio Compression	G.711u
Audio Input Interface	4-ch, RCA (2.0 Vp-p, 1 KΩ)
Two-way Audio	1-ch, RCA (2.0 Vp-p, 1 KΩ) (using audio input)
Video/Audio output	
CVBS Output	1-ch,BNC(1.0Vp-p,75Ω),resolution:PAL:704x576,NTSC:704x480
HDMI/VGA Output	1920 × 1080 / 60 Hz,1280 × 1024 / 60 Hz, 1280 × 720 / 60 Hz, 1024 × 768 / 60 Hz
Recording resolution	Main stream: 3MP@15fps;1080p/720p/WD1/4CIF/VGA/CIF@25fps Sub-stream:WD1/4CIF@12fps(non-real-time);CIF/QVGA/QCIF(real-time)
Frame Rate	Main stream: 3MP@15fps;1080p/720p/WD1/4CIF/VGA/CIF@25fps Sub-stream:WD1/4CIF@12fps;CIF/QVGA/QCIF@25fps
Video Bit Rate	32 Kbps-10 Mbps
Stream Type	Video/Video&Audio
Two-way Audio	1-ch, RCA (2.0 Vp-p, 1 kΩ) (using the audio input)
Audio Output	1-ch RCA(Linear, 1kΩ)
Audio Bit Rate	64kbps
Dual Stream	Support
Playback Resolution	3MP/1080P/720P / VGA / WD1 / 4CIF / CIF / QVGA / QCIF
Synchronous Playback	4-ch
Network management	
Remote connections	128
Network protocols	TCP/IP, PPPoE, DHCP, Hik Cloud P2P, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF
Hard disk	
SATA	1 SATA interface
Capacity	Up to 6TB capacity
External interface	
Network interface	1; 10M / 100M self-adaptive Ethernet interface
USB Interface	2 USB 2.0 Interfaces
Serial Interface	1; standard RS-485 serial interface, half-duplex
Alarm in/out	4/1
General	
Power supply	12 VDC
Consumption (without HDD)	≤ 15 W
Working temperature	-10 °C to +55 °C
Working humidity	10% to 90%
Dimensions	315 × 240 × 48 mm
Weight (without HDD)	≤ 1.5 kg

Rear Panel of MZ 40HT

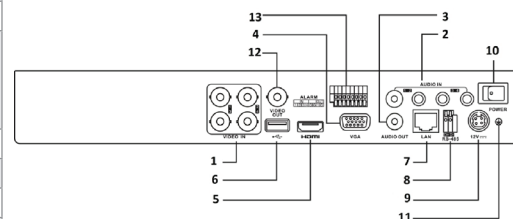

- 1 VIDEO IN
- 2 AUDIO IN, RCA Connector
- 3 AUDIO OUT, RCA Connector
- 4 VGA Interface
- 5 HDMI Interface
- 6 USB Interface
- 7 LAN Network Interface
- 8 RS-485 Serial Interface
- 9 12VDC Power Input
- 10 Power Switch
- 11 GND
- 12 VIDEO OUT
- 13 Alarm in/out