


DV-320AR-36

2MP Fixed Lens Small Dome/Turret Camera And White LED

The rainbow camera series is equipped with super light-sensitive sensors that allow the camera to provide a color image throughout the day. When the ambient light is insufficient, the camera will turn on the integral lighting, allowing it to continue providing a full-color image. Featuring 4in1 technology, the camera is ideal for Plug & Play over existing analog infrastructure. With its outstanding performance, reliability, and affordable price, the DV-320AR-36 camera is the perfect solution for basic installations.

2
MP

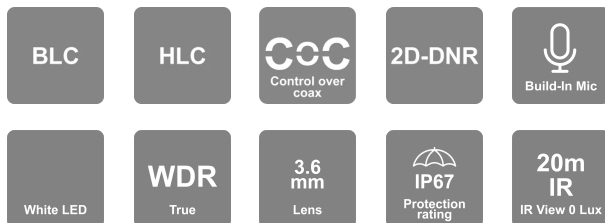

MAIN FEATURES

- DV-320AR-36 2MP Fixed Lens Small Dome/Turret Camera And White LED
- Sensor: 1/2.8" 5MP CMOS Sensor
- Selectable Output: 2MP: 1920×1080 AHD/TVI/CVI CVBS: 700TVL
- Lens: 3.6mm Mega-Pixel Fixed (85°)
- 24/7 Full-Color Day Mode
- 2D-DNR
- Digital WDR/HLC/BLC
- Illumination: 20m (2 High-Power White LED)
- IP67
- Weight: ~450g
- Power: DC12V/300mA



SPECIFICATIONS

Video	
Image Sensor	1/2.8" 5MP CMOS Sensor
Image Format	16:9
Effective Pixels	1920 x 1080
Scanning System	Progressive
Min. Illumination	0 lux with LED
Day & Night	24/7 Full-Color Day Mode
Day & Night Modes	24/7 Full-Color Day Mode only
Compression	
Resolution	2MP: 1920x1080 AHD/TVI/CVI CVBS: 700TVL
Frame Rate	25/30FPS
Image	
Backlight Compensation	BLC/HLC
S/N Ratio	≥52dB (AGC off)
Privacy Zone	no
Noise Reduction	2D-DNR
Image Enhancement	Digital WDR, BLC, HLC
On Screen Data	
CoC Support	Yes
OSD Menu	Available via CoC only
Lens	
Field of View	3.6mm Mega-Pixel Fixed (85°)
Iris	Fixed Iris
Lens Mount	M12 Mount

Connectivity	
Video Output	2MP AHD/TVI/CVI/CVBS + PAL/NTSC
Audio Connectivity	Built-in Microphone
Housing	
Illumination	20m (2 High-Power White LED)
Bracket	3-Axis Bracket
Protection Rate	IP67
Dimensions	Ø97mm×82.6mm
Weight (gross)	~450g
Power	DC12V/300mA
Work Environment	-30°C ~ 50°C , 10% ~ 90% humidity

DIMENSIONS

